

BTeV Ring Imaging Cherenkov Detector (WBS 1.3)

Marina Artuso

Tomasz Skwarnicki



Outline


 Introduction and overview of the BTeV Ring Imaging Cherenkov Detector (RICH)

□ WBS 1.3 – RICH

- ☐ Project requirements and description
- ☐ Project organization
- ☐ Cost, Schedule and Critical Path
- ☐ Milestones
- ☐ Responses to DOE CD1 Recommendations
- Presentations prepared for the breakout sessions
- Conclusions
- Glossary




The BTeV RICH Components

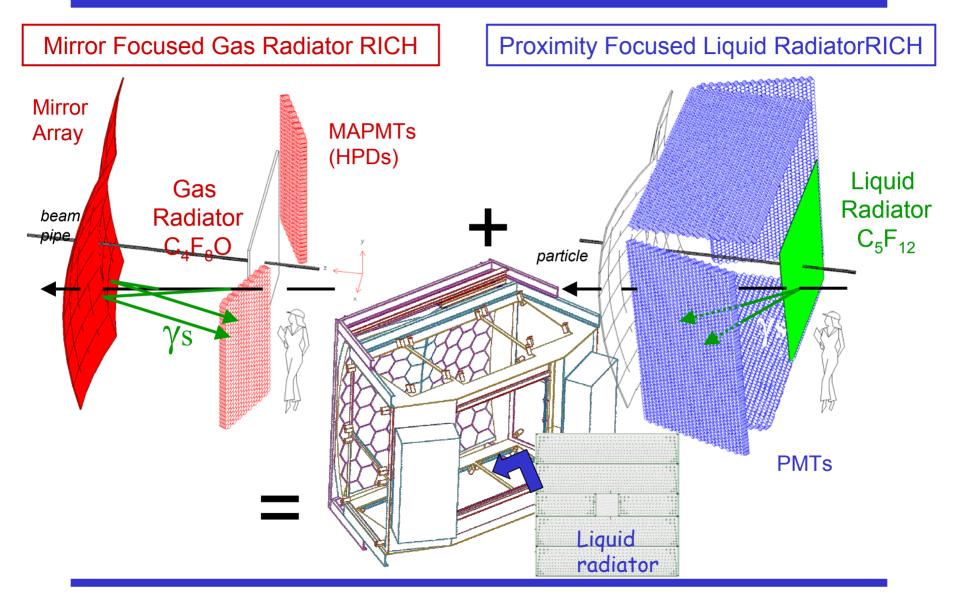


BTeV BTeV RICH: A good match to our physics goals





Liquid C₅F₁₂



- The combination of gas and liquid radiator RICH achieve the desired particle species separation over the whole momentum range of interest:
 - ➤ The gas radiator RICH provides good hadron separation up to 70 GeV/c
 - The liquid radiator RICH provides p/K separation below 9.5 Gev/c.
 - The RICH detector provides μ
 ID up to 17 GeV/c and electron
 ID up to 23 GeV/c over the full
 solid angle coverage of the
 BTeV tracking system.




The RICH Detector Sub-systems

- The photon detectors for the GAS RICH
 - ➤ Baseline is 16 channel Hamamatsu MAPMTs with DEP 163 channel HPDs as viable alternative
- The photon detectors for the LIQUID RICH
 - ➤ 3" PMTs (off-shelf products of Hamamatsu, Burle, Photonics and ElectronTubes)
- The front end electronics
 - Front end hybrids developed in collaboration with IDEAS, NO and front end multiplexer boards developed at Syracuse University
- The mirror
 - ➤ Light-weight mirror made up of multiple tiles, CMA, Tucson, AZ baseline solution, several alternative options
- The mechanical structure (a superstructure where all the various components are assembled in a staged installation)
- High voltage, low voltage and cooling infrastructure (1KV HV+ low noise ±5V system).




Gas Radiator Photon Detectors

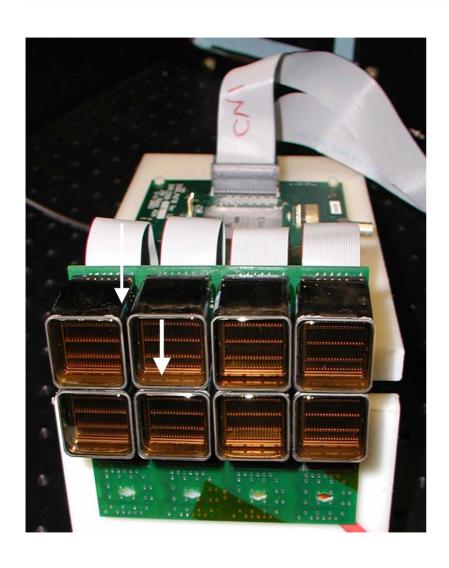

- Baseline solution: 16 channel Hamamatsu R8900-00-M16 MaPMTs (9016 devices for 2 arrays)
- Main features:
 - \square Predicted $\sigma_{\text{track}} \sim 0.115 \text{ mr}$
 - **□** Predicted $N_{\gamma} \sim 52$
 - □ QE*CE 13-15%
 - ☐ Active area: 85%
 - ☐ 6x6 mm pixel size well suited for BTeV
 - \Box Gain [1-4x10⁶]
 - ☐ HV 600-900 V (negative)
 - Standing current in voltage divider 340 μA
- ☐ Alternative solution 163 pixel HPD from DEP, presently more expensive



Photon detector electronics

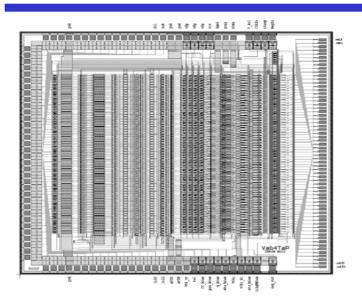



FRONT END ASIC must

- ➤ Low noise (~1000 e⁻)
- On chip sparsification
- ➤ High Dynamic range
- ➤ Parallel digital readout to allow event synchronization

PROTOTYPING STEPS implemented:

- ➤ VA_BTeV1 [for HPD readout: low noise (500e⁻ ENC), discriminator not optimized for high counting rates] & Va+BTeV1.1 [improved discriminator and 1 analog test channel]
- VA_MaPMT [for MAPMT, improved discriminator, 1 analog test channel]
- ➤ In progress: optimization of dynamic range for MaPMT applications and of noise versus C_{in} for PMT applications



The RICH Mirror System

- Two large mirrors, each one has 200cm (width) and 400cm (height). They can be broken down to any number of mirrors of any shape, so that cost and performance are optimized.
- A half circle hole in the side (of radius ~3 cm).
- Mean radius is fixed to 697cm.
- 1-2% radiation length
- CMA approach: each mirror made up of 8 square tiles

design

1 of RICH
mirror based on
CMA segment
design

3937€


Example of CMA PROJECTS

•CMA provided competitive quote & demonstrated capabilities beyond our needs (optical properties controlled to fraction of a wave)





C₄F₈O radiator test beam studies

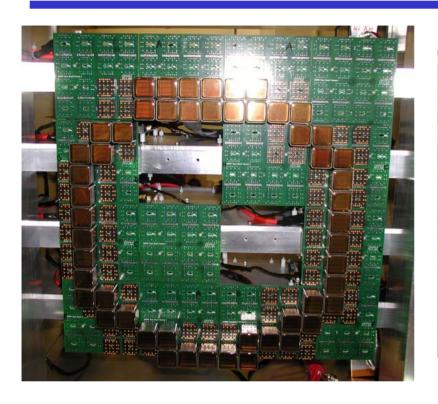




 All 52 MAPMTs deployed and read out with prototype front end electronics designed for our applications



Example of data versus MC comparison

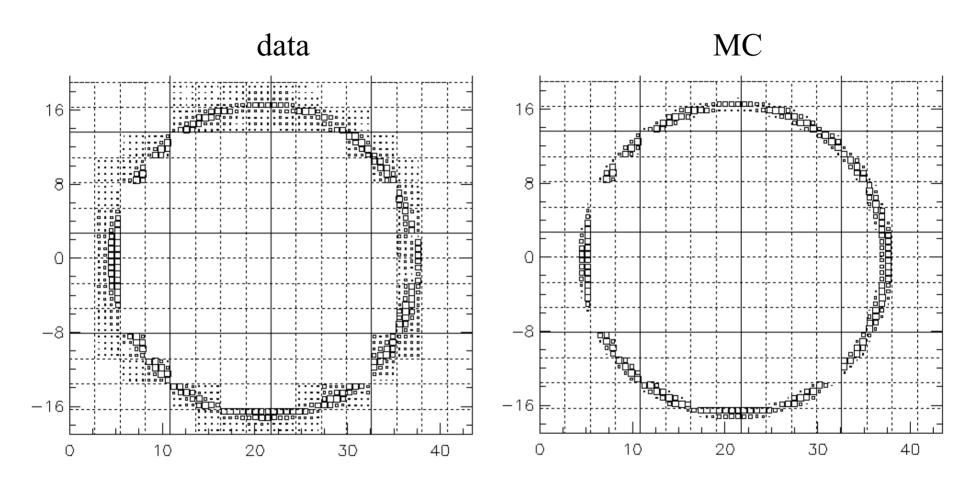


MC predictions in agreement with the data



Photodetectors for the Liquid Radiator RICH


- Standard (single anode) 3" PMT:
 - ➤ Need about 5,000 tubes
 - \triangleright 8-stage box dynode structure; gain $\sim 10^5$
 - Produced in mass quantities for medical applications
- We tested sample tubes from 4 manufacturers:
 - ➤ Burle, Electron Tubes, Photonics and Hamamatsu
 - ➤ All capable of detecting a single photon
 - ➤ Magnetic field sensitivity was determined (OK when shielded by mumetal tubes)



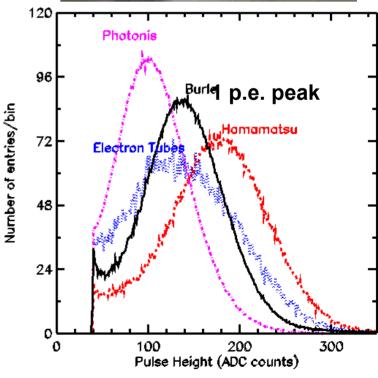




The RICH Vessel Superstructure

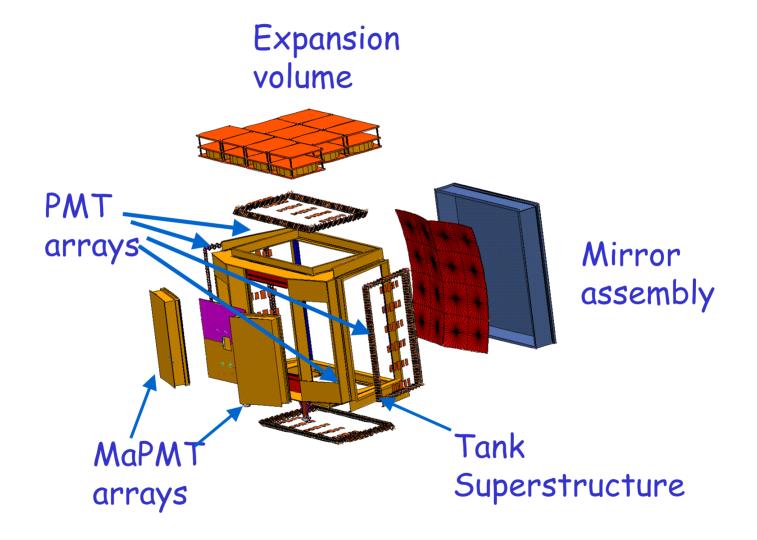



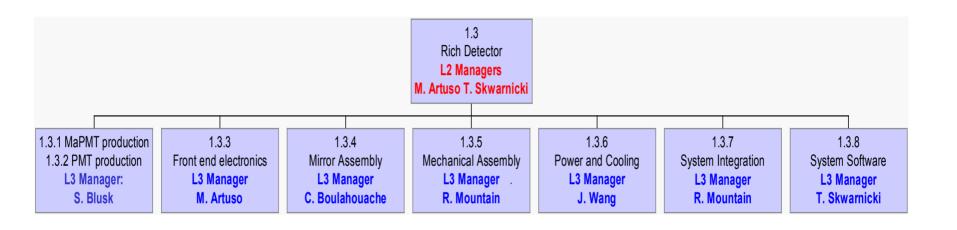


Base cost: 12.1 M\$, (Material 9.9 M\$, Labor 2.2 M\$) + NSF support for R&D work (unchanged from CD1 review)

Activity ID	Activity Name	Base Cost (\$)	Material Contingency (%)	Labor Contingency (%)			Total FY07				Total FY05-10
	Multi-anode PMT Photon Detectors (MAPMTs)	5,461,375	39	31	65,863	1,974,017	3,658,062	1,911,152	1,118	0	7,610,213
	Photomultiplier Tubes (PMTs)	1,161,277	25	24	0	203,098	306,716	677,752	264,029	0	1,451,595
	Photon Detector Electronics	1,659,190	44	43	131,558	1,115,022	1,138,293	0	0	0	2,384,873
1.3.4	Mirror Arrays	792,604	53	32	29,133	925,493	212,578	1,908	0	0	1,169,112
	Mech Gas Liquid & Related Systs	1,436,859	28	29	63,128	317,781	875,858	93,356	494,430	0	1,844,554
	Power Monit Cooling & Related Systs	783,141	25	20	9,171	1,374	60,308	866,553	33,962	0	971,368
	RICH Detector Install & Integ & Test	394,595	21	28	109,381	33,594	303,977	45,173	4,661	0	496,786
1.3.8	RICH Detector SW	188,110	44	33	0	0	56,275	190,178	6,754	0	253,206
	RICH Detector Subproject Management	250,317	20	20	53,303	112,071	49,479	26,099	52,080	7,349	300,380
1.3	file_13s_21sep04	12,127,468	37	29	461,538	4,682,449	6,661,545	3,812,171	857,036	7,349	16,482,087

unchanged from CD1 review




M&S Cost Profile by Fiscal Year WBS 1.3

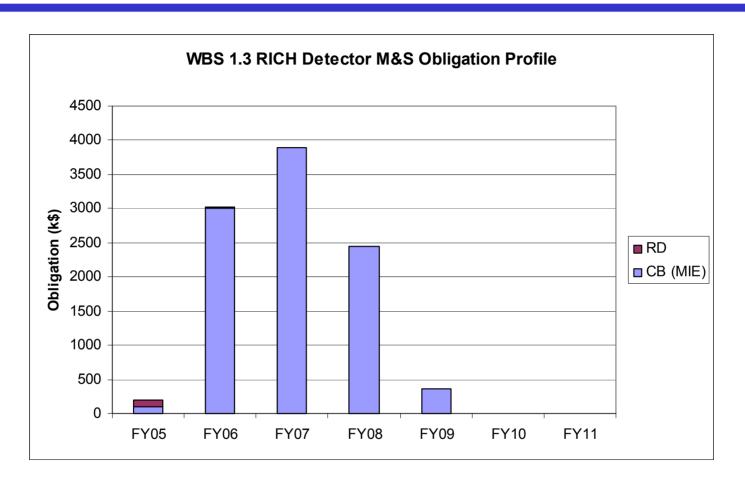

	FY05	FY06	FY07	FY08	FY09	FY10
CB (MIE)	96	3005	3890	2455	360	
RD	106	20				




Labor Profile by Fiscal Year WBS 1.3

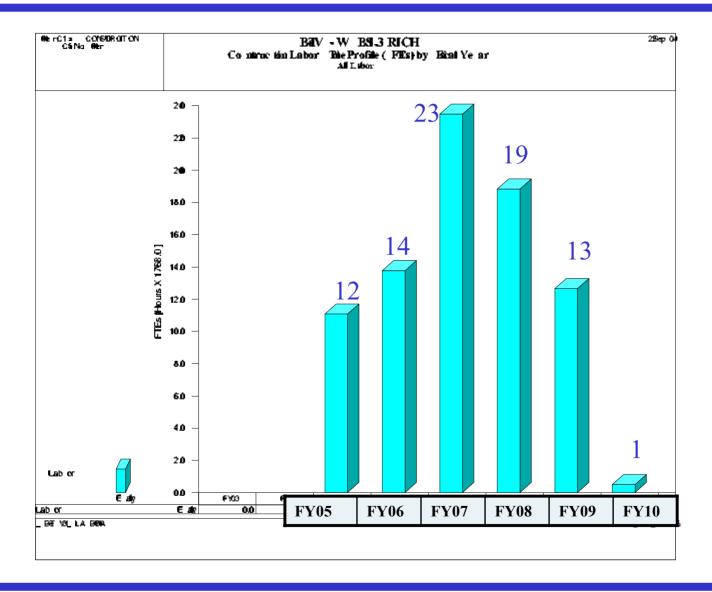

Description of Project Flow

WBS 1.3

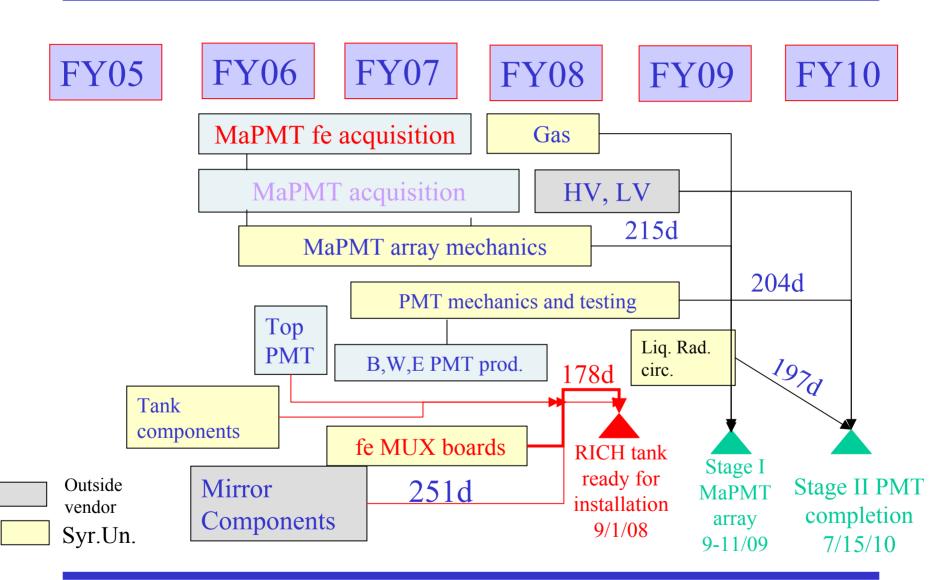


Critical Path Analysis Without Distributed Floats WBS 1.3

- Partially instrumented RICH tank ready to roll into collision hall (TF = 178d days)
 - ➤ The latest component to arrive is the multiplexer board that needs to be designed in parallel with DCB board (DAQ-WBS 1.9).
 - ➤ Other important tasks that affect this milestone are TOP PMT array implementation (TF=232 d) and mirror procurement (TF=251d).
- MaPMT Array Installation (TF = 215 days)
 - ➤ MaPMT procurement completed in FY07. The assembly and test schedule are closely integrated to optimize the completion time.
- PMT final installation (TF = 197 days)
 - ➤ The float is determined by the present planned time for the completion of the liquid radiator fluid circulation and monitoring systems. The PMT acquisition and testing has comparable robustness (TF=204 days).



Critical Path Analysis Gantt Chart

WBS 1.3

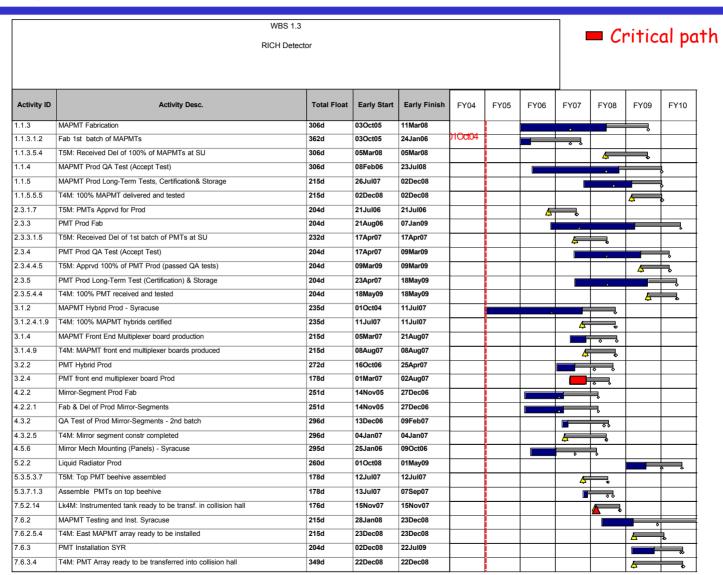



Key Milestones with distributed floats

WBS 1.3

Milestone	Date
T3M-21:Mirror segment constr. completed	27 Dec, 2006
T2M-6: RICH Tank installed in C0	1 Aug, 2008
T2M-6 MaPMT PO Awarded	3 Oct, 2005
T3M-17: Start MaPMT prod	3 Oct, 2005
T3M-18: All MaPMT Delivered	5 Mar, 2008
T3M-19: MaPMT Hyb. Prod. Started	28Dec, 2005
T3M-20: MaPMT hyb. Production completed	3 Nov, 2006
T3M-22: RICH Detector completely ready for installation at C0	23 Dec, 2008
T3M-23: Liquid Radiator PMTs proc. completed	7 Jan, 2009
T3M-24: Liquid Radiator assembly completed	21 May, 2009

Need by date

eed by date
7. May 2010



Responses to CD1 recommendations

Recommendations:

- ➤ Test prototype detectors in C0 asap to gain experience in a hadron collider
- ➤ Measure neutron flux in various locations in C0
- \triangleright Study compatibility test between C₄F₈O and materials in the vessel

Response:

- ➤ We can take data in C0 with the LR prototype that will be used in the beam test of FY05 and do more extensive background studies
- > We have a material compatibility tests under way



Material Compatibility test (in progress)



- Vessel containing gas and material under test will be maintained in an oven at 70° C and changes will be assessed on a weekly basis
 - > UVT acrylic
 - ➤ G-10 board
 - Mirror material
 - > Rubber O-ring material
 - Epoxies : Armstrong Hysol Araldite...
 - ➤ Al, Construction steel, copper tubing, brass polyflow fitting
 - > Teflon, Kevlar, carbon fiber
- Mechanical and optical properties will be assessed on a weekly basis
- Mirror optical properties when operating in gas environment



Summary

More information on the RICH detector project is available in the breakout sessions.

- Cost and Schedule Overview Marina Artuso
- Photon detectors Tomasz Skwarnicki
- MaPMT test beam results Tomasz Skwarnicki
- Mirror design and testing Tomasz Skwarnicki
- Mechanical design overview Herman Cease



The End



Glossary of Terms

- MAPMT module: 32 MAPMT units mounted on a HV base board [HV connector + voltage dividers]
- MAPMT channel: support structure for 1 row of 49x4
 MAPMTs
- PMT module: single PMT in injection mold ready for assembly in PMT beehive
- PMT beehive: PMT array support structure and B-field shield made up of mu-metal cylinders glued together
- FE electronics: Front End Hybrids [mixed-analog-digital front end circuitry] + Front end MUX [x4 multiplexer boards connected with remote data combiner boards]



Key Milestones without distributed floats

Milestone	Date
T3M-21:Mirror segment constr. completed	27 Dec, 2006
T2M-6: RICH Tank installed in C0	1 Aug, 2008
T2M-6 MaPMT PO Awarded	3 Oct, 2005
T3M-17: Start MaPMT prod	3 Oct, 2005
T3M-18: All MaPMT Delivered	5 Mar, 2008
T3M-19: MaPMT Hyb. Prod. Started	28Dec, 2005
T3M-20: MaPMT hyb. Production completed	3 Nov, 2006
T3M-22: RICH Detector completely ready for installation at C0	23 Dec, 2008
T3M-23: Liquid Radiator PMTs proc. completed	7 Jan, 2009
T3M-24: Liquid Radiator assembly completed	21 May, 2009

Need by date



Schedule Contingency

WBS 1.3

- ➤ Placed before key milestones or activities on critical or near critical path
- Nominally zero duration
- > Distribute float throughout the duration of the project

										Float		
Activity ID	Activity Description	Activity Type	Duration	Float	Early Start	FY04	FY05	FY06	FY07	FY08	FY09	FY10
.1.3.1.1	SC: MaPMT Production Actual Start	ASAP	0	362d	03Oct05		.1.3.1.1					
1.1.3.2.1	SC: MaPMT2nd batch actual start	ASAP	0	362d	17May06	ne Now	1.1.	3.2.1				
1.1.3.4.1	SC: MaPMT production for East Array Start	ASAP	0	368d	19Feb07			1.1.3.	1.1	-		
1.1.3.5.4	T5M: Received Del of 100% of MAPMTs at SU	Finish Milesto	0	306d	05Mar08				1.1.3.	5.44		
1.1.4.5.5	T5M: Apprvd 100% of MAPMT Prod	Finish Milesto	0	306d	23Jul08				1.	1.4.5.5 🛵		
1.1.5.5.5	T4M: 100% MAPMT delivered and tested	Finish Milesto	0	215d	02Dec08					1.1.5.5.		
2.3.3.1.4	SC: PMT Top production held	ASAP	0	232d	17Apr07		!	2.3.3	.1.4			
2.3.3.1.5	T5M: Received Del of 1st batch of PMTs at SU	Finish Milesto	0	232d	17Apr07				.1.54			
2.3.3.4.5	T5M: Received Del of 100% PMTs at SU	Finish Milesto	0	326d	07Jan09		į			2.3.3.4	54	
2.3.5.4.4	T4M: 100% PMT received and tested	Finish Milesto	0	204d	18May09					2.3	5.4.4	
3.1.2.2.1.2	SC: MaPMT production actual start	ASAP	0	235d	28Dec05		8.1.2.2.1.	2				
3.1.2.2.1.6	T4M: MAPMT hybrid production completed	Finish Milesto	0	295d	03Nov06		3	1.2.2.1.6	4	-		
3.1.2.4.1.9	T4M: 100% MAPMT hybrids certified	Finish Milesto	0	235d	11Jul07			3.1.	2.4.1.9			
3.1.4.1	SC: actual MUX production start	ASAP	0	215d	05Mar07				4.1			
3.1.4.9	T4M: MAPMT front end multiplexer boards produced	Finish Milesto	0	215d	08Aug07				3.1.4.9			
3.2.2.3.6	T4M: PMT front end production ends	Finish Milesto	0	272d	25Apr07			3.2.	2.3.64			
3.2.4.2	SC: Actual start of Mux Productions	ASAP	0	178d	01Mar07			3.2.	4.2			
3.2.4.8	T4M: End PMT MUX board production	Finish Milesto	0	178d	02Aug07				3.2.4.8			
4.2.1.10	T5M: Mirror-segments Apprvd for Prod	Finish Milesto	0	251d	14Nov05		4.2.1.10	4	1	_		
4.2.2.1.1	SC: Mirror segment prod delayed	ASAP	0	251d	14Nov05		4.2.2.1.					
4.2.2.1.6	T5M: Finish Mirrror Segment Prod	Finish Milesto	0	251d	27Dec06			4.2.2.1.	6/5			
4.3.2.5	T4M: Mirror segment constr completed	Finish Milesto	0	296d	04Jan07			4.3.2				
4.5.6.1.5	SC: Mirror Panel Production Delay	ASAP	0	295d	09Oct06			4.5.6.1.5				
4.5.9.1.6	T4M: Mirror array mech completed	Finish Milesto	0	295d	23Oct06			4.5.9.1.6				
7.5.1.5.1.2	SC: Assembly hall ready for mirror work	ASAP	0	296d	05Jan07			7.5.1.5.1	2			
7.5.2.14	Lk4M: Instrumented tank ready to be transf. in collision hall	Finish Milesto	0	176d	15Nov07				7.5.2.14	<u></u>		
7.5.3	SC: Assembly Hall ready for RICH	ASAP	0	176d	26Mar07			7	5.3	\		
7.6.2.5.3	T4M: West MAPMT Arrays ready to be Installed	Finish Milesto	0	402d	15Feb08			<u> </u>	7.6.2.	.34		
7.6.3.4	T4M: PMT Array ready to be transferred into collision hall	Finish Milesto	0	349d	22Dec08		i			7.6.3.	145	
7.6.3.5	Lk4M: West PMT Array Delivered to assembly hall	Finish Milesto	0	284d	09Mar09						3.5	Ě



Gantt chart with distributed floats WBS 1.3

WBS 1.3 RICH Detector Activity ID Activity Desc. **Total Float** Early Start Early Finish FY04 FY05 FY06 FY07 FY08 FY09 FY10 1.1.3 MAPMT Fabrication 263d 03Oct05 09May08 10ct04 Fab 1st batch of MAPMTs 04Jan06 25Apr06 263d 1.1.3.5.4 T5M: Received Del of 100% of MAPMTs at SU 263d 05May08 05May08 1.1.4 MAPMT Prod QA Test (Accept Test) 263d 10May06 23Sep08 1.1.5 MAPMT Prod Long-Term Tests, Certification& Storage 19Oct07 155d 1.1.5.5.5 T4M: 100% MAPMT delivered and tested 03Mar09 03Mar09 2.3.1.7 T5M: PMTs Apprvd for Prod 202d 21Jul06 21Jul06 233 PMT Prod Fab 202d 21Aug06 07Jan09 23315 T5M: Received Del of 1st batch of PMTs at SU 202d 29May07 29May07 2.3.4 PMT Prod QA Test (Accept Test) 202d 30May07 09Mar09 2.3.4.4.5 T5M: Apprvd 100% of PMT Prod (passed QA tests) 204d 09Mar09 09Mar09 235 PMT Prod Long-Term Test (Certification) & Storage 202d 05Jun07 18May09 2.3.5.4.4 T4M: 100% PMT received and tested 204d 18May09 18May09 3.1.2 MAPMT Hybrid Prod - Syracuse 195d 01Oct04 06Sep07 3.1.2.4.1.9 T4M: 100% MAPMT hybrids certified 195d 06Sep07 06Sep07 3.1.4 MAPMT Front End Multiplexer board production 155d 05Mar07 14Nov07 3.1.4.9 T4M: MAPMT front end multiplexer boards produced 01Nov07 01Nov07 155d 3.2.2 PMT Hybrid Prod 272d 16Oct06 25Apr07 324 PMT front end multiplexer board Prod 118d 01Mar07 26Oct07 4.2.2 Mirror-Segment Prod Fab 191d 14Nov05 23Mar07 4.2.2.1 Fab & Del of Prod Mirror-Segments 191d 14Nov05 23Mar07 4.3.2 QA Test of Prod Mirror-Segments - 2nd batch 12Mar07 206d 04May07 4.3.2.5 T4M: Mirror segment constr completed 206d 30Mar07 30Mar07 <u>/</u> 4.5.6 Mirror Mech Mounting (Panels) - Syracuse 295d 25Jan06 17Nov06 5.2.2 Liquid Radiator Prod 260d 01Oct08 01May09 5.3.5.3.7 T5M: Top PMT beehive assembled 05Oct07 05Oct07 118d 5.3.7.1.3 08Oct07 Assemble PMTs on top beehive 118d 04Dec07 75214 Lk4M: Instrumented tank ready to be transf. in collision hall 14Feb08 14Feb08 118d 7.6.2 MAPMT Testing and Inst. Syracuse 155d 28Jan08 24Mar09 T4M: East MAPMT array ready to be installed 155d 24Mar09 24Mar09 7.6.3 PMT Installation SYR 204d 02Dec08 22Jul09 7.6.3.4 T4M: PMT Array ready to be transferred into collision hall 22Dec08 22Dec08